



+

P/N:4244
21-100-180

HIGH PERFORMANCE LITHIUM CELL

SIZE
SUB CC

- + Low Rate Capability
- + Lithium / Thionyl Chloride Chemistry
- + Custom terminations available

CELL SPECIFICATIONS

Open Circuit Voltage (25° C)	3.65 V
Rated Discharge Current	30 mA
Rated Capacity	7.5 Ah
Max Current to Achieve 100% Capacity	30 mA
Cell Diameter (nominal)	21.00 mm (0.83 in.)
Cell Length (nominal)	101.6 mm (4.00 in.)
Cell Weight	69.5g
Lithium Weight	3.1g
Self Discharge	2% per year at 25°C
Operating Temperature	+50°C to +180°C +122°F to +356°F


OPERATING TEMPERATURE



Rev: Jul 2007

PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

Discharge at 30 mA, 120° C

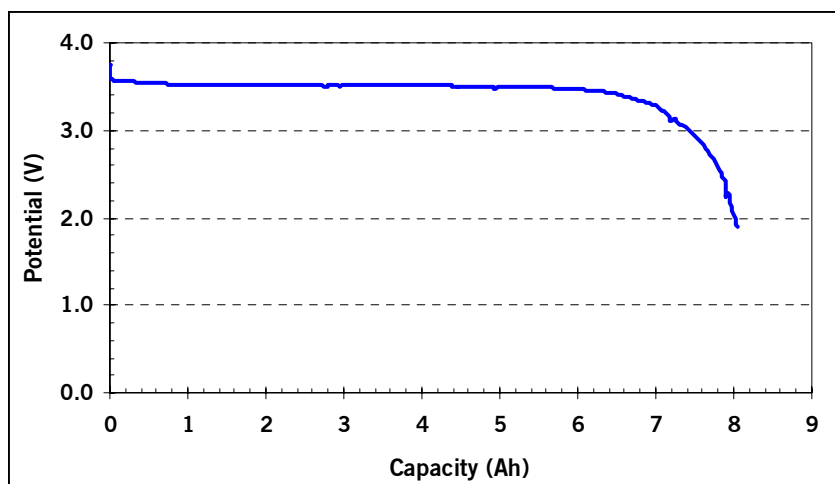

+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031
 + 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM
 + SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.



THE WORLD'S MOST RELIABLE > MOST DURABLE > LONGEST-LASTING > CELLS AND BATTERY PACKS