



+

P/N:4410  
33-120-200 MR

# HIGH PERFORMANCE LITHIUM CELL

SIZE  
DD

- + Moderate Rate Capability
- + Lithium / Thionyl Chloride Chemistry
- + Custom terminations available

## CELL SPECIFICATIONS

Open Circuit Voltage (25° C)	3.67 V
Rated Discharge Current	200 mA
Rated Capacity	20 Ah
Max Current to Achieve 100% Capacity	300 mA
Cell Diameter (nominal)	31.75 mm (1.25 in.)
Cell Length (nominal)	125.1 mm (4.93 in.)
Cell Weight	225g
Lithium Weight	7.2g
Self Discharge	2% per year at 25°C
Operating Temperature	+70°C to +200°C +158°F to 392°F


## OPERATING TEMPERATURE



Rev: June 2007

PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

## Discharge at 200 C

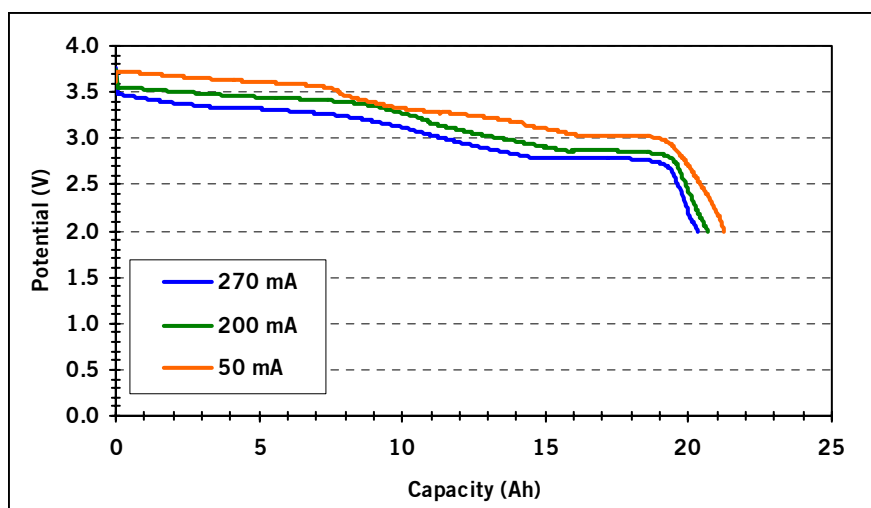

+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031  
+ 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM  
+ SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.



THE WORLD'S MOST RELIABLE > MOST DURABLE > LONGEST-LASTING > CELLS AND BATTERY PACKS